

MLSSA SPO 4.0D #960903-3057-3075 for Jiri Komon
 Measured Data QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.16	Ohms
2	Fs	41.24	Hz
3	Re	3.28	Ohms[dc]
4	Res	30.68	Ohms
5	Qms	2.40	
6	Qes	0.26	
7	Qts	0.23	
8	L1	0.37	mH
9	L2	0.40	mH
10	R2	2.25	Ohms
11	RMSE-load	0.19	Ohms
12	Vas(Sd)	29.09	liters
13	Mms	14.73	grams
14	Cms	1011	μ M/Newton
15	B1	6.99	Tesla-M
16	SPLref(Sd)	90.8	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (20.00 grams)

Area (Sd): 143.14 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -33.7% (-20% to -50% is recommended).

ARN SPECIAL KUBALA


MLSSA: Parameters

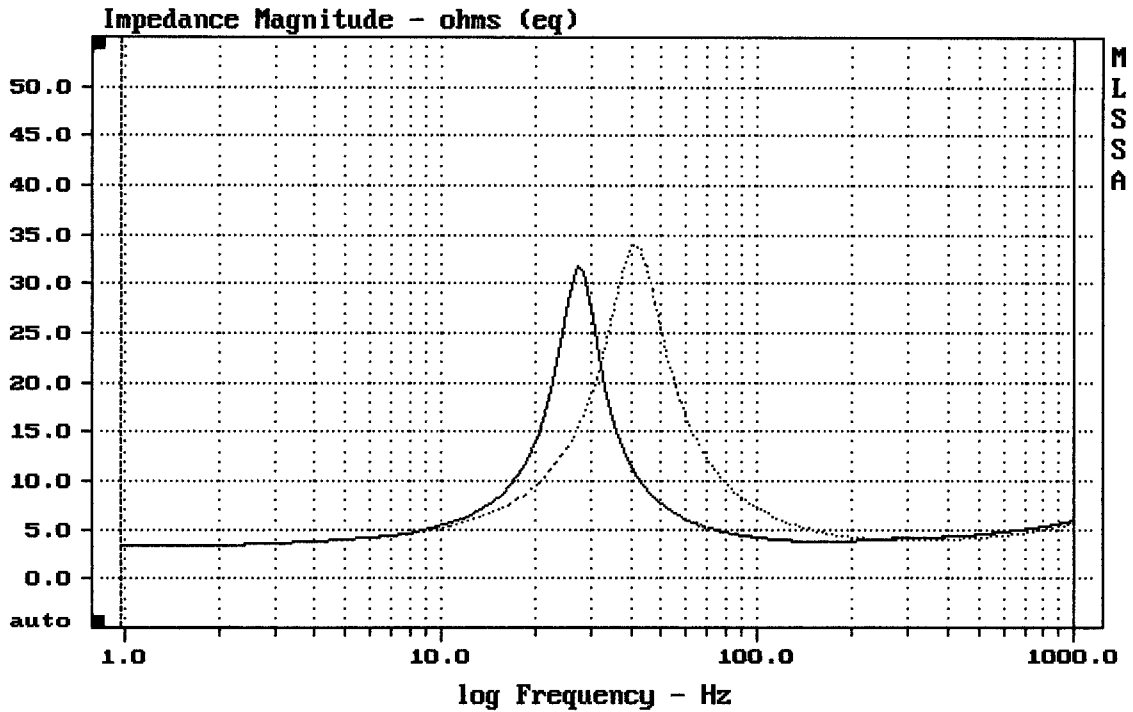

mean: 5.568, rms: 6.887, std: 4.053, max: 33.95, min: 3.396

9-19-86 1:32 PM

MLSSA: Frequency Domain

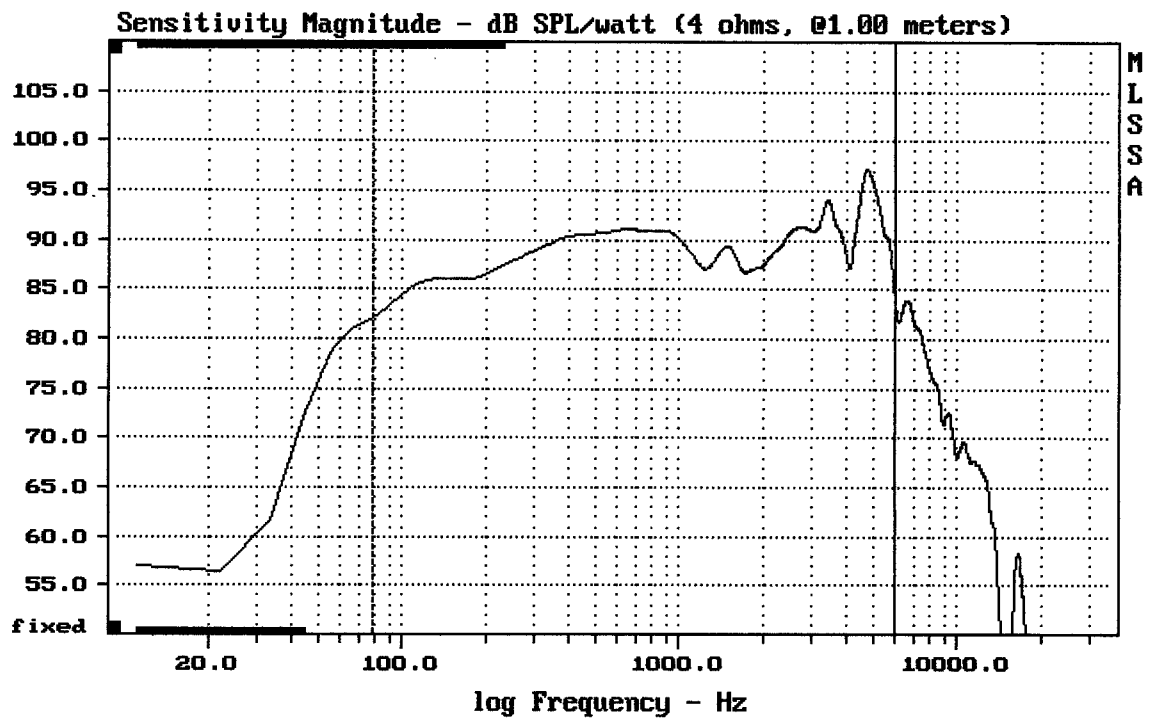


Level (78:6004 Hz) = 89.73 dB SPL/watt (4 ohms, 01.00 meters)

ARN SPECIAL KUBALA

9-19-86 2:00 PM

MLSSA: Frequency Domain

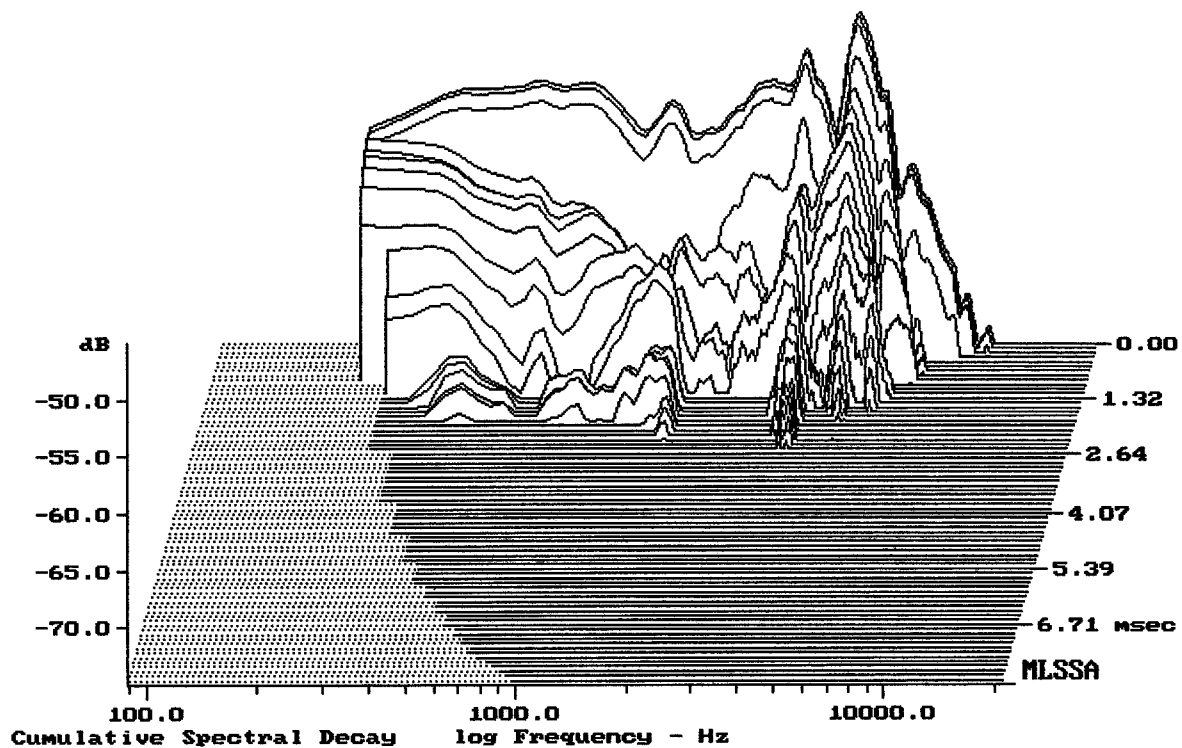

-73.77 dB, 3462 Hz (78), 2.420 msec (23)